


DIGITUS HP-HPE compatible mini GBIC (SFP) Module, 1.25 Gbps, 0.55 Km

DN-81000-04
EAN 4016032451808

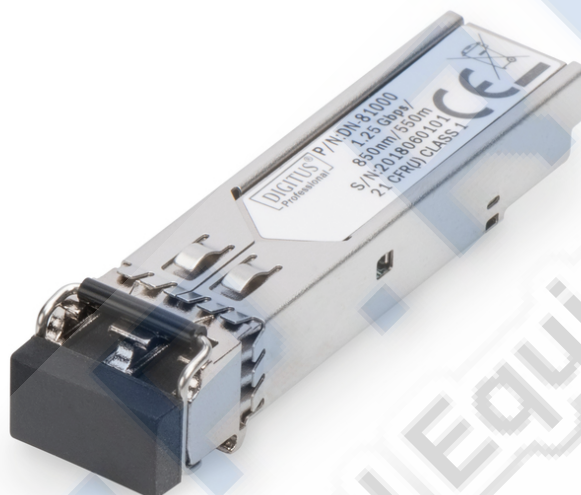

1.25 Gbps SFP Module, Multimode, HPE-compatible LC Duplex Connector, 850nm, up to 550m, HPE

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- HP-HPE compatible
- Mini GBIC SFP (Small Form Factor Pluggable) module
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable




- Connector: 1x LC Duplex
- 1000Base-SX - For Short Haul
- Wavelength: 850nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity Receiving Power: Minimum -20 dBm
- For a Distance of up to 0.55km
- Suitable for 50/125µm and 62.5/125µm multimode fiber cables
- Safe fast-locking mechanism
- Operating temperature: 0 °C ~ 70 °C
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: HP, Universal (MSA)
- Connector: LC
- DDM Support: no
- Distance (km): 0.5
- Mode: Multimode
- Ethernet speed: Gigabit
- Wavelength: 850 nm

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	3.10	11.80	9.00	329.22
Net single without Packaging	1	0.02	3.10	11.80	9.00	329.22

More images:

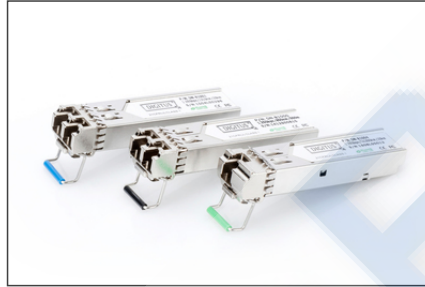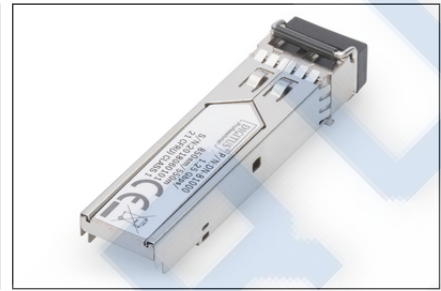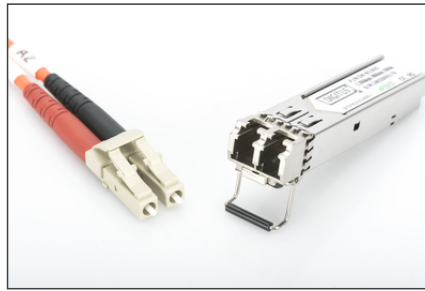

Product Number	SKU Code	Speed	Distance	Connector	Wavelength	Operating Temperature	RoHS Status
DM-4000	4000000000	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4001	4000000001	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4002	4000000002	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4003	4000000003	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4004	4000000004	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4005	4000000005	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4006	4000000006	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4007	4000000007	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4008	4000000008	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4009	4000000009	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4010	4000000010	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4011	4000000011	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4012	4000000012	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4013	4000000013	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4014	4000000014	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4015	4000000015	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4016	4000000016	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4017	4000000017	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4018	4000000018	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓
DM-4019	4000000019	1.0 Gbps	2 km	LC Duplex	1550 nm	0 to 70 °C	✓
DM-4020	4000000020	1.0 Gbps	2 km	LC Duplex	1310 nm	0 to 70 °C	✓