

mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81003**4016032305682**


The plug and play fiber connection

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Bidirectional WDM Module - Only one fiber is needed
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Simplex
- Wavelength: Tx 1310nm / Rx 1550nm
- Transmission Power: Minimum -5 dBm, Maximum 0 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for OM3/OM4 Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Suitable Module for Opposite Side: DN-81004

PACKAGE CONTENT

- SFP module
- Connector 1:
- Connector 2:
- Cable type:
- Fiber class:
- Mode:
- Color cable:
- Boot:
- Fiber diameter:
- Number of fibers:
- Number of connectors side 1:
- Number of connectors side 2:
- Drawing-in tube:
- Cable diameter: mm
- Cable jacket:
- Length: m
- Packaging:

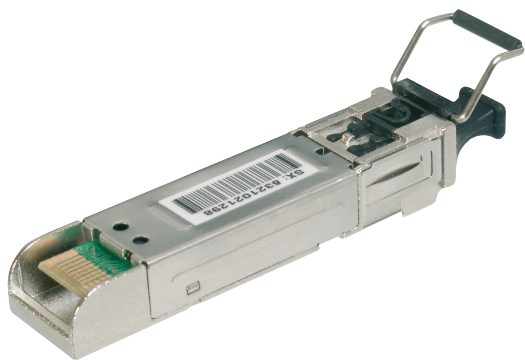

S-F-P-RU
Network Optical Equipment

