



**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring**  
**155 Mbps SONET OC-3/SDH STM-1/125 Mbps Fast Ethernet**



**Features**

- RoHS compliant
- SONET/SDH application
- Fast Ethernet application
- SFF8472 diagnostic monitoring interface
- Industry standard small form pluggable (SFP) package
- Duplex LC connector
- Differential inputs and outputs
- Single power supply 3.3V
- TTL signal detect indicator
- Hot Pluggable
- Class 1 laser product complies with EN 60825-1

**Ordering Information**

PART NUMBER	INPUT/OUTPUT	SIGNAL DETECT	VOLTAGE	TEMPERATURE
LM38-A3C-TC-N-DD	AC/AC	TTL	3.3V	0°C to 70 °C
LM38-A3C-TI-N-DD	AC/AC	TTL	3.3V	-40°C to 85 °C

**Diagnostics**

Parameter	Range	Accuracy	Unit	Calibration
Temperature	-40 to 95	± 3	°C	External
Voltage	3.1 to 3.5	± 0.1	V	
Bias Current	0 to 80	± 10%	mA	
TX Power	-22 to -12	± 3 dB	dBm	
RX Power	-33 to -12	± 3 dB	dBm	



RoHS compliant  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring**  
**155 Mbps SONET OC-3/SDH STM-1/125 Mbps Fast Ethernet**

**Absolute Maximum Ratings**

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Storage Temperature	$T_S$	-40	85	°C	
Supply Voltage	$V_{CC}$	-0.5	4.0	V	
Input Voltage	$V_{IN}$	-0.5	$V_{CC}$	V	

**Recommended Operating Conditions**

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Case Operating Temperature	$T_C$	0 -40	70 85	°C	
Supply Voltage	$V_{CC}$	3.1	3.5	V	
Supply Current	$I_{TX} + I_{RX}$	---	200	mA	

**Transmitter Electro-optical Characteristics**

$V_{CC} = 3.1\text{ V to }3.5\text{ V}, T_C = 0^\circ\text{C to }70^\circ\text{C} (-40^\circ\text{C to }85^\circ\text{C})$

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Data Rate	$B$	50	155	200	Mb/s	
Output Optical Power 62.5/125 $\mu\text{m}$ fiber	$P_{out}$	-20	---	-14	dBm	Note1
Extinction Ratio	$ER$	10	---	---	dB	
Center Wavelength	$\lambda_C$	1260	1310	1360	nm	
Spectral Width (FWHM)	$\Delta\lambda$	---	---	120	nm	
Rise/Fall Time (10–90%)	$T_{r,f}$	---	---	2	ns	
Max. $P_{out}$ TX-DISABLE Asserted	$P_{OFF}$	---	---	-45	dBm	
Output Eye	Compliant with Telcordia GR-253-CORE Issue 3 and ITU-T recommendation G-957					
Differential Input Voltage	$V_{DIFF}$	0.4	---	2.0	V	

Note1: Measured average power coupled into 62.5/125um fibre with NA = 0.275



RoHS compliant  
1310 nm Multi-mode Transceiver (2km)  
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring  
155 Mbps SONET OC-3/SDH STM-1/125 Mbps Fast Ethernet

### Receiver Electro-optical Characteristics

$V_{CC} = 3.1 \text{ V to } 3.5 \text{ V}$ ,  $T_C = 0^\circ \text{ C to } 70^\circ \text{ C}$  ( $-40^\circ \text{ C to } 85^\circ \text{ C}$ )


PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Data Rate	$B$	50	155	200	Mb/s	
Optical Input Power -maximum	$P_{IN}$	-8	---	---	dBm	Note 1
Optical Input Power -minimum (Sensitivity)	$P_{IN}$	---	---	-31	dBm	Note 1
Operating Center Wavelength	$\lambda_C$	1260	---	1600	nm	
Data Output Rise, Fall Time (10%~90%)	$T_{r,f}$	---	1	2	ns	
Loss of Signal-Asserted	$P_A$	---	---	-31	dBm	
Loss of Signal-Deasserted	$P_D$	-45	---	---	dBm	
Loss of Signal-Hysteresis	$P_A - P_D$	1.0	---	---	dB	
Differential Output Voltage	$V_{DIFF}$	0.5	---	1.2	V	
Receiver Loss of Signal Output Voltage-Low	$RX\_LOS_L$	0	---	0.5	V	
Receiver Loss of Signal Output Voltage-High	$RX\_LOS_H$	2.4	---	$V_{CC}$	V	

Note 1: The input data is at 155.52 Mbps,  $2^{23}-1$  PRBS data pattern. The receiver is guaranteed to provide output data with Bit Error Rate (BER) better than or equal to  $1 \times 10^{-10}$ .



RoHS compliant  
1310 nm Multi-mode Transceiver (2km)  
Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring  
155 Mbps SONET OC-3/SDH STM-1/125 Mbps Fast Ethernet

### Dimensions


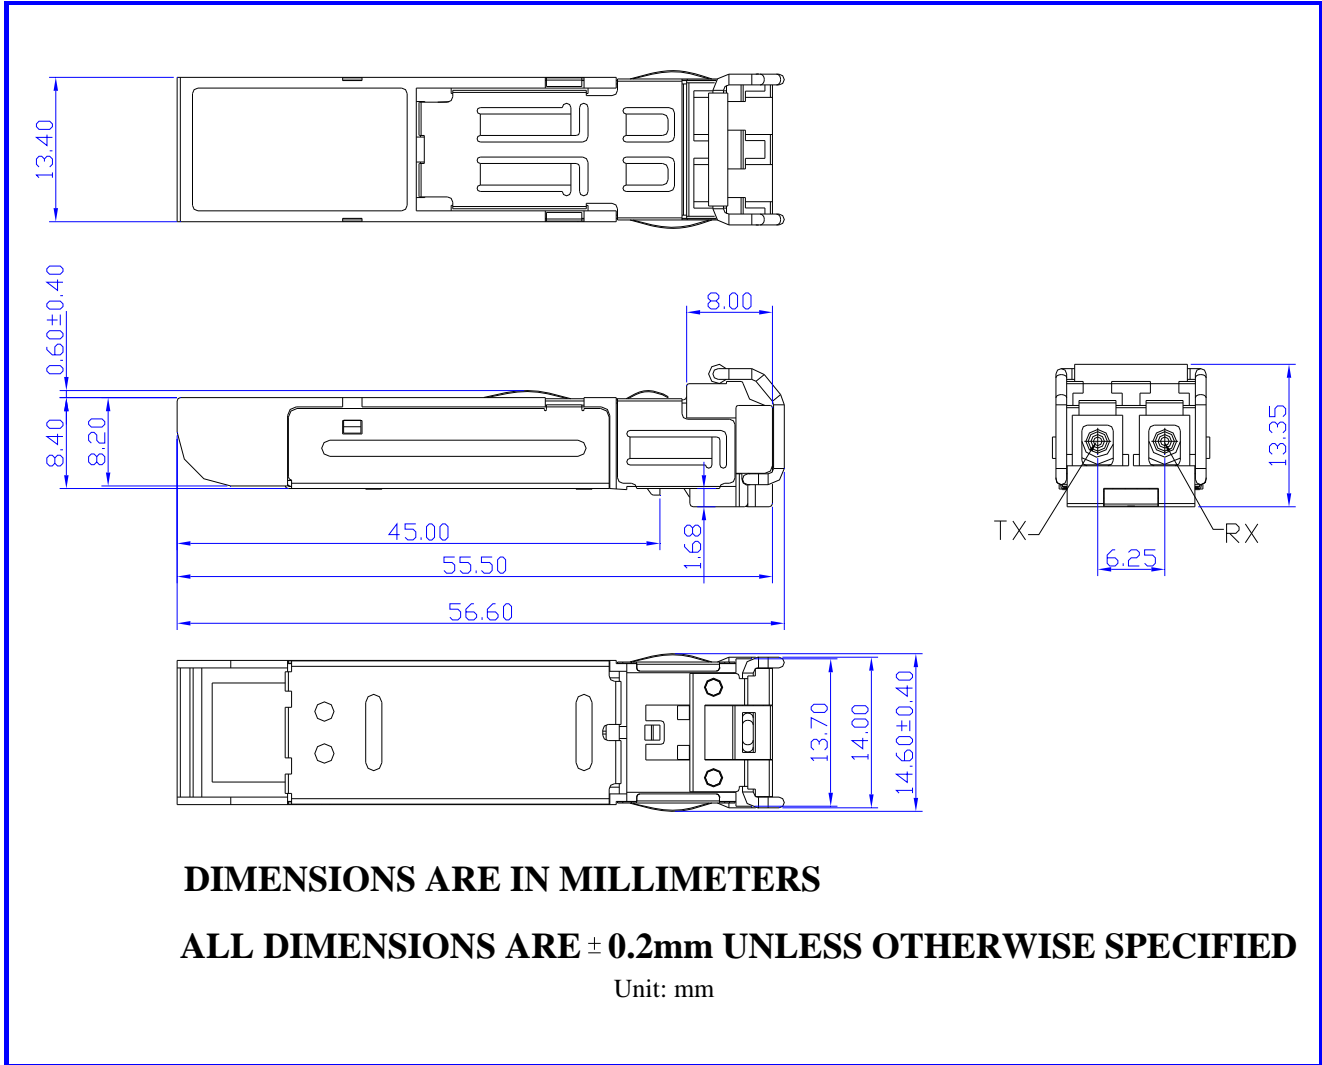


**DIMENSIONS ARE IN MILLIMETERS**

**ALL DIMENSIONS ARE ± 0.2mm UNLESS OTHERWISE SPECIFIED**

Unit: mm

**SFP host board mechanical layout**

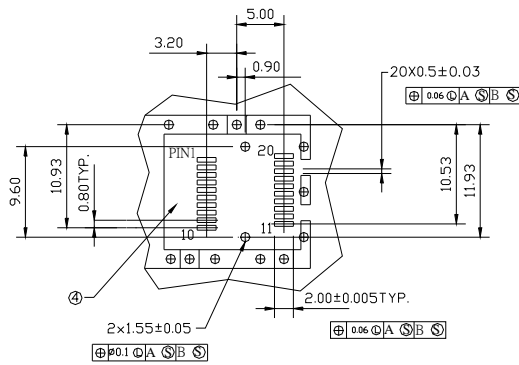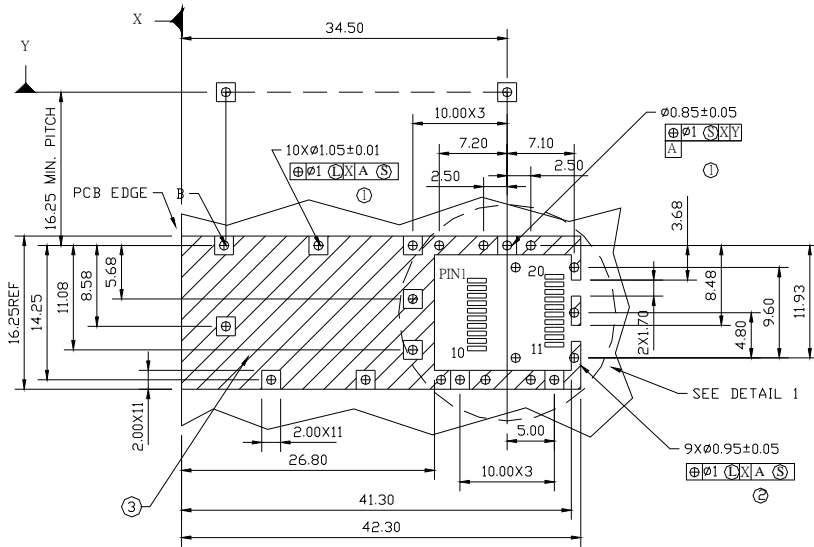

DETAIL 1

**LEGEND**

- 1.PADS AND VIAS ARE CHASSIS GROUND
- 2.THROUGH HOLES, PLATING OPTIONAL
- 3.HATCHED AREA DENOTES COMPONENT AND TRACE KEEPOUT(EXCEPT CHASSIS GROUND)
- 4.AREA DENOTES COMPONENT KEEPOUT (TRACES ALLOWED)


DIMENSIONS ARE IN MILLIMETERS

Unit: mm



**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring**  
**155 Mbps SONET OC-3/SDH STM-1/125 Mbps Fast Ethernet**

**Assembly drawing**

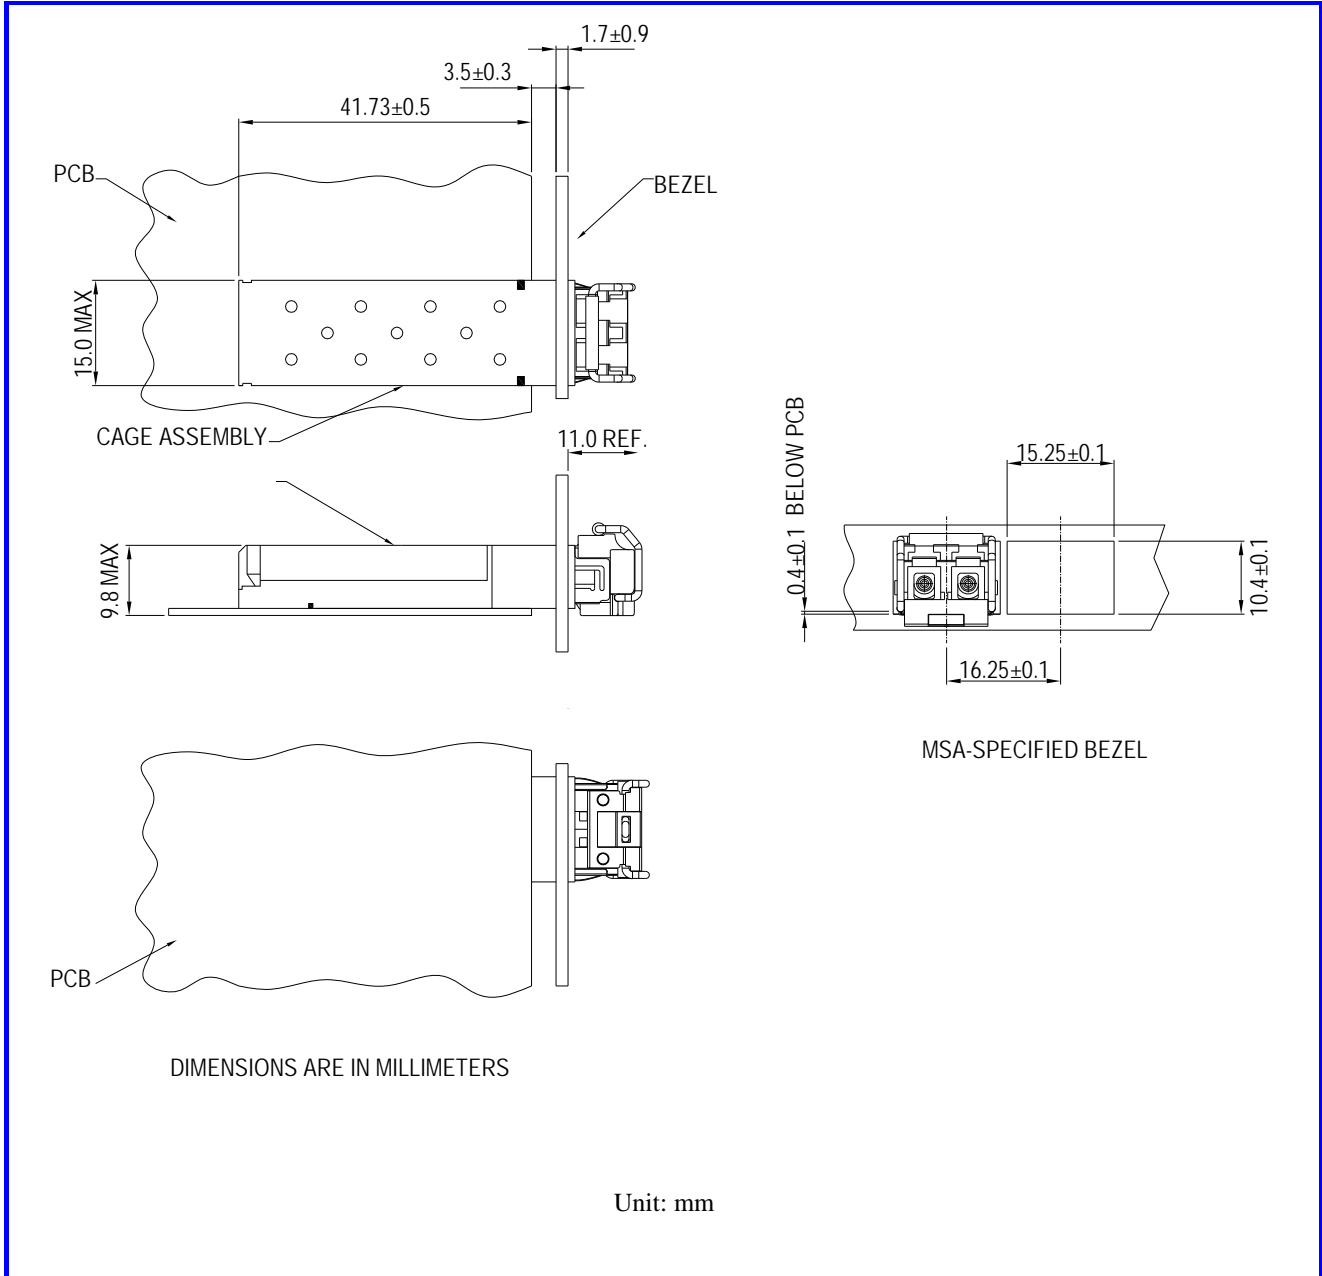




**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring**  
**155 Mbps SONET OC-3/SDH STM-1/125 Mbps Fast Ethernet**

**Pin Assignment**

Pin-Out

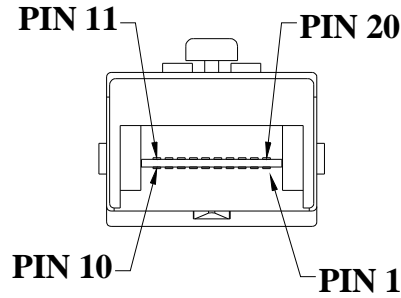

Pin	Signal Name	Description
1	$T_{GND}$	Transmit Ground
2	$TX\_FAULT$	Transmit Fault
3	$TX\_DISABLE$	Transmit Disable
4	$MOD\_DEF (2)$	SDA Serial Data Signal
5	$MOD\_DEF (1)$	SCL Serial Clock Signal
6	$MOD\_DEF (0)$	TTL Low
7	$RATE\_SELECT$	Open Circuit
8	$RX\_LOS$	Receiver Loss of Signal, TTL High, open collector
9	$R_{GND}$	Receiver Ground
10	$R_{GND}$	Receiver Ground
11	$R_{GND}$	Receiver Ground
12	$RX-$	Receive Data Bar, Differential PECL, ac coupled
13	$RX+$	Receive Data, Differential PECL, ac coupled
14	$R_{GND}$	Receiver Ground
15	$V_{CCR}$	Receiver Power Supply
16	$V_{CCT}$	Transmitter Power Supply
17	$T_{GND}$	Transmitter Ground
18	$TX+$	Transmit Data, Differential PCEL, ac coupled
19	$TX-$	Transmit Data Bar, Differential PCEL, ac coupled
20	$T_{GND}$	Transmitter Ground



**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V, with Diagnostic Monitoring**  
**155 Mbps SONET OC-3/SDH STM-1/125 Mbps Fast Ethernet**

---

**Eye Safety Mark**

The LM3 series transceiver is a class 1 laser product. It complies with EN 60825-1 and FDA 21 CFR 1040.10 and 1040.11. In order to meet laser safety requirements the transceiver shall be operated within the Absolute Maximum Ratings.

**Caution**

**All adjustments have been done at the factory before the shipment of the devices. No maintenance and user serviceable part is required. Tampering with and modifying the performance of the device will result in voided product warranty.**

**Required Mark**

Class 1 Laser Product  
Complies with  
21 CFR 1040.10 and 1040.11

Note : All information contained in this document is subject to change without notice.