

SPT-P556G-40D

1550 nm 4.9G/6.144Gbps SFP+ Transceiver 40km for CPRI and OBSAI

Features

- Compliant with SFF-8413 and IEE802.3ae
- Support Multi Rate up to 4.9G/6.144Gbps
- 1550nm DFB transmitter and PIN receiver
- link length up to 40km
- Low Power Dissipation 1.5W Maximum
- 0°C to 70°C Operating Case Temperature
- Single 3.3V power supply
- Diagnostic Performance Monitoring of module temperature, supply voltages, laser bias current, transmit optical power, receive optical power
- RoHS compliant and lead free

Applications

- Radio Base Station
- LTE optical repeater application
- OBSAI interface, such as 6.144 Gb/s, 3.072 Gb/s, 1.536 Gb/s, 0.768Gb/s
- CPRI interface, such as 6.144 Gb/s, 4.915 Gb/s, 2.458 Gb/s, 1.229 Gb/s, 0.614Gb/s

Product Description

SPT-P136G-40D is a high performance, cost effective modules, which is supporting Multi Rate 4.9G/6.144Gbps and transmission distance up to 40km on SM fiber. The transceiver consists of two sections: The transmitter section incorporates a 1550nm DFB driver and re-timer. The receiver section consists of a PIN photodiode integrated with a Trans impedance preamplifier (TIA). The module is hot pluggable into the 20-pin connector. The high-speed electrical interface is based on low voltage logic, with nominal 100 Ohms differential impedance and AC coupled in the module.

Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Unit
Supply Voltage	Vcc	-0.5	3.8	V
Storage Temperature	Tst	-40	85	°C
Relative Humidity	Rh	0	85	%

Operating Conditions

Parameter	Symbol	Min.	Typical	Max	Unit	Note
Supply Voltage	Vcc	3.13	3.3	3.47	V	
Supply current	Icc			220	mA	40km
Operating Case temperature	Tca	0	-	70	°C	
Module Power Dissipation	Pm	-	1.2	1.5	W	

Notes:

[1] Supply current is shared between VCCTX and VCCR_X.

[2] In-rush is defined as current level above steady state current requirements.

Transmitter Specifications - Optical

Parameter	Symbol	Min	Typical	Max	Unit	Note
Center Wavelength	λ_c	1530		1565	nm	
Optical Average Power	P _o	0	-	3	dBm	40km
Optical OMA Power	P _{om}	-2.1			dBm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Optical Transmit Power (disabled)	PTX_DISABLE	-	-	-30	dBm	
Extinction Ratio	ER	6			dB	40km,1
RIN _{OMA} [1]				-128	dB/Hz	
Optical Return Loss Tolerance				21	dB	

Notes:

[1] RIN measurement is made with a return loss at 21 dB.

Transmitter Specifications - Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Data Rate	M _{ra}	-		6.144	Gbps
Input differential impedance	R _{im}	-	100	-	Ω
Differential data Input	V _{txDIFF}	120	-	850	mV
Transmit Disable Voltage	VD	2.0	-	V _{cc} +0.3	V
Transmit Enable Voltage	V _{en}	0	-	+0.8	V

Receiver Specifications - Optical

Parameter	Symbol	Min	Typical	Max	Unit	Note
Input Operating Wavelength	λ	1530	-	1565	nm	
Receiver sensitivity		-	-	-17	dBm	40km
Stressed receiver sensitivity in OMA[1]				-15	dBm	
Maximum Input Power	RX-overload	-	-	0	dBm	
Reflectance	R _{rx}	-	-	-27	dB	

Loss of Signal Asserted	LosA	-28	-	-	dBm	40km
		-36	-	-	dBm	60km
LOS De-Asserted	LosD	-	-	-18	dBm	40km
		-	-	-25	dBm	60km
LOS Hysteresis		0.5	-	-	dB	


Notes:

[1] Measured with conformance test signal for BER = 10^{-12} . The stressed sensitivity values in the table are for system level BER measurements which include the effects of CDR circuits. It is recommended that at least 0.4 dB additional margin be allocated if component level measurements are made without the effects of CDR circuits.

Receiver Specifications - Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Data Rate	Mra	-		6.144	Gbps
Differential Output Swing	Vout P-P	350	-	850	mV
Rise/Fall Time	Tr / Tf	24	-	-	ps
Loss of Signal –Asserted	VOH	2	-	Vcc3+0.3-	V
Loss of Signal –Negated	VOL	0	-	+0.4	V

Pin Assignment

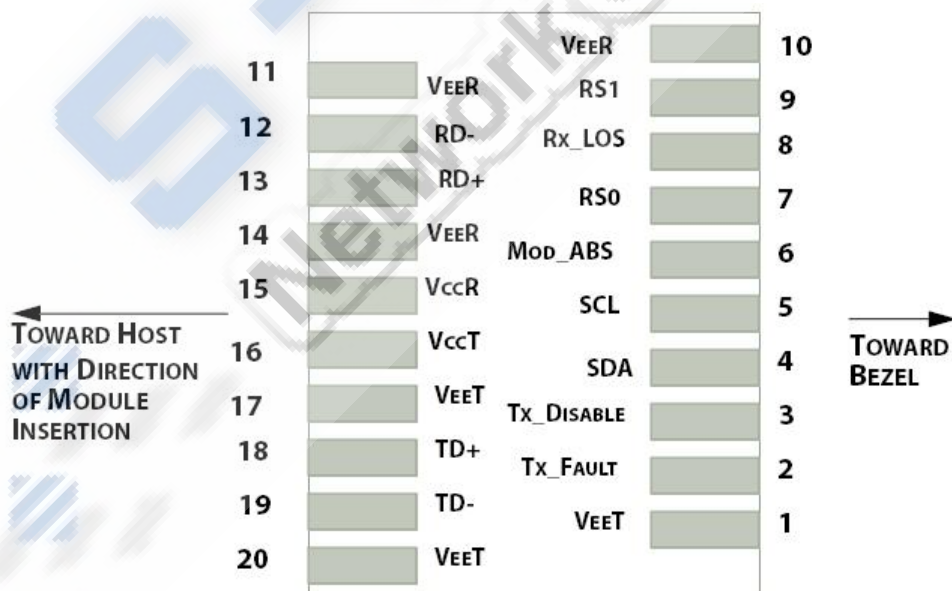

Pin	Symbol	Name/Description
1	VEET [1]	Transmitter Ground
2	Tx_FAULT [2]	Transmitter Fault

3	Tx_DIS [3]	Transmitter Disable. Laser output disabled on high or open
4	SDA [2]	2-wire Serial Interface Data Line
5	SCL [2]	2-wire Serial Interface Clock Line
6	MOD_ABS [4]	Module Absent. Grounded within the module
7	RS0 [5]	RS0 for Rate Select: Open or Low = Module supports ≤ 4.25 Gbps High = Module supports 9.95 Gb/s to 10.3125 Gb/s
8	RX_LOS [2]	Loss of Signal indication. Logic 0 indicates normal operation
9	RS1 [5]	No connection required
10	VEER [1]	Receiver Ground
11	VEER [1]	Receiver Ground
12	RD-	Receiver Inverted DATA out. AC Coupled
13	RD+	Receiver DATA out. AC Coupled
14	VEER [1]	Receiver Ground
15	VCCR	Receiver Power Supply
16	VCCT	Transmitter Power Supply
17	VEET [1]	Transmitter Ground
18	TD+	Transmitter DATA in. AC Coupled
19	TD-	Transmitter Inverted DATA in. AC Coupled
20	VEET [1]	Transmitter Ground

Notes:

[1] Module circuit ground is isolated from module chassis ground within the module.

[2].should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.

[3]Tx_Disable is an input contact with a 4.7 k Ω to 10 k Ω pullup to VccT inside the module.

[4]Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range 4.7 k Ω to 10 k Ω .Mod_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.

[5] RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 k Ω resistors in the module.

Recommended

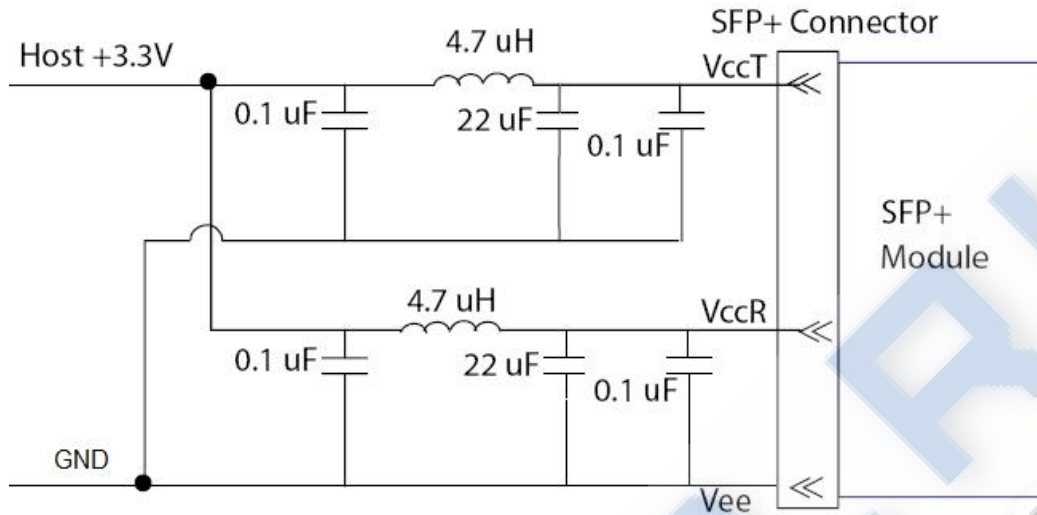


Figure2. Host Board Power Supply Filters Circuit

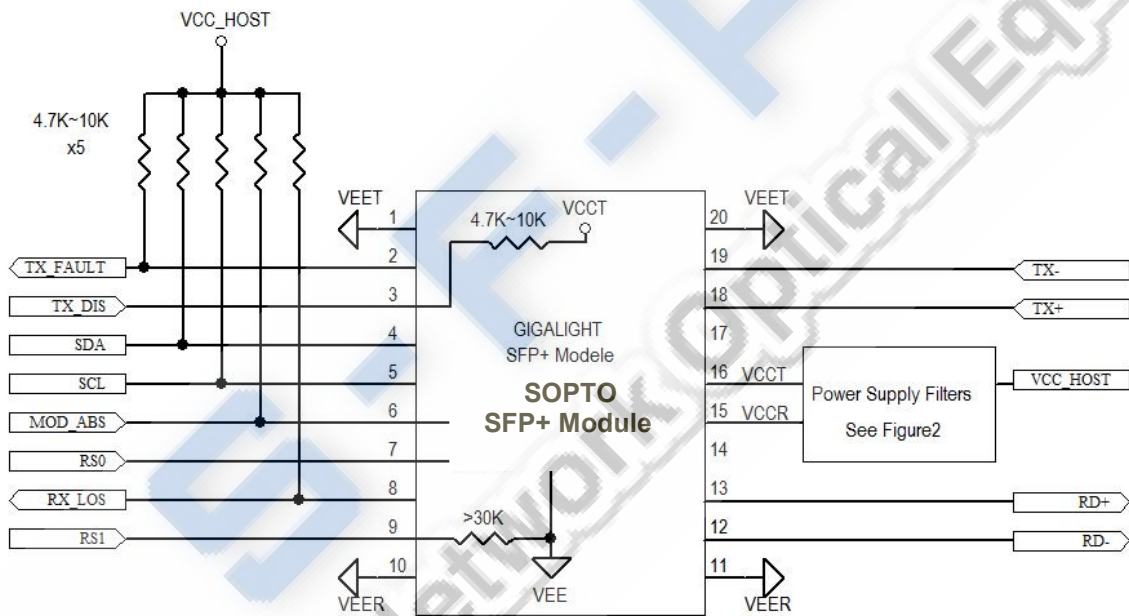


Figure3. Host-Module Interface

Mechanical Dimensions

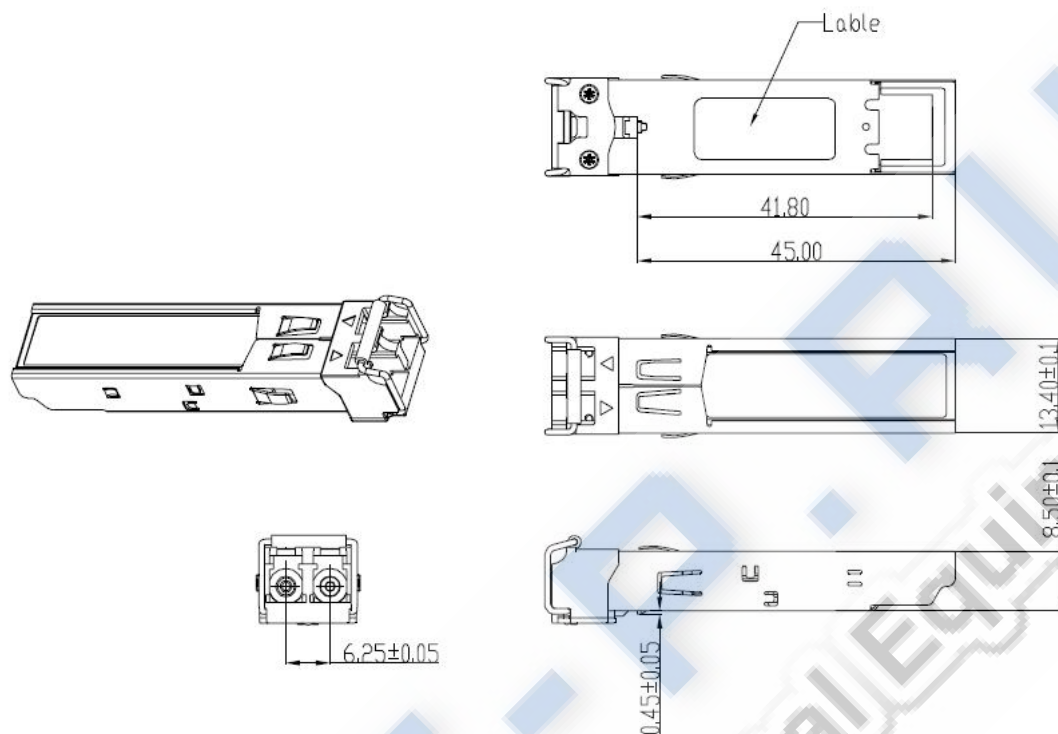


Figure4. Mechanical Specifications

Ordering information

Part Number	Product Description
SPT-P556G-40D	1550nm, 4.9G/6.144Gbs, 40km, 0°C ~ +70°C,DDM

Note: If you need more customized services, please contact us.

E-mail: info@sopto.com.cn

Web : <http://www.sopto.com.cn>